
CAT5 AV Splitter

Simultaneously Broadcast Audio And Video To Up To 4 Additional Remote Monitors Over A Single CAT5 Cable



- Broadcasts over 250m/820ft via CAT5 cable from all 4 ports
- Multimedia broadcasting - Transmits both sound and video
- Compatible with all major brands of sound cards
- Pure plug and play hardware solution
- Volume adjustment at the remote unit
- Cascadable


Broadcasts Multimedia 1/4 Kilometer Over CAT5

CAT5 AV Splitter

Minicom's CAT5 AV Splitter broadcasts a single video screen, with sound, to up to 4 remote monitors. All 4 remote monitors can be located at various locations within your facility at a distance of up to 250 m/820 ft away. The AV Splitter includes full audio capabilities so viewers not only see what is being broadcasted but hear it as well.

Single CAT5 Connectivity

The system comprises a central unit at the main monitor and a dedicated remote unit at each of the remote monitors. The two units are connected via a single CAT5 cable, which significantly reduces confusing cable clutter and makes installation easy - simply plug and play.

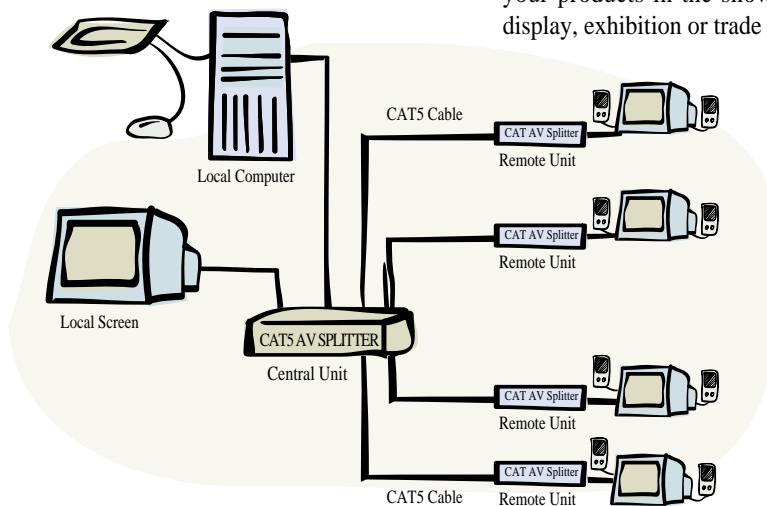

Wide Range Of Applications

The CAT5 AV Splitter is the ideal solution for numerous applications.

- Data Presentation: Important real time data such as arrival/departure information at an airport or train station or stock prices at an exchange can be simultaneously broadcasted to multiple remote monitors.
- Entertainment or Advertising: Broadcast television shows in restaurants or video promotions in stores.
- Monitoring Security: A sensitive area in a plant, such as an entrance or warehouse can be monitored 24 hours a day from multiple remote locations.
- Education and Training: Place multiple monitors in your training facility for more effective instruction.
- Product Demonstration: Add power to a demonstration of your products in the showroom, boardroom, window display, exhibition or trade show.



FRONT VIEW



REAR VIEW



VGA CABLE



AUDIO CABLE

Features

- Transmission over a single, CAT5 cable
- Multimedia broadcasting - Both sound and video
- Transmits over 250m/820ft from all 4 ports
- Simple plug and play installation
- Volume adjustment at the remote unit
- Compatible with all major brands of sound cards
- High-quality stereo audio broadcasting

Technical Specifications

Model	Central 2.4 Port / Remote / Remote L
System Cable	CAT5, FTP Solid Wire 2x4x24 AWG RJ45m
Maximum Distance	110-250m
Cascadable	Yes
Video	VGA, SVGA, XGA
Resolution	1280x1024/75 Hz
Dimensions	45(1U)x101x198mm / 45(1U)x91x113mm
Weight	450g / 260g
Shipping Weight	1.76 kg / 1.2 kg
Power Supply	External 110V or 220V 9V 2A
Operating Temperature	Up to 50C°
Storage Temperature	-40 C° - +70 C°
Warranty Headquarters	12 months
VGA to CPU	HD15M - HD15F

Ordering information

Central 2 Ports	0VS22006
Central 4 Ports	0VS22008
Remote	0VS21006
Remote Long Range	0VS21008

Authorized Reseller



Headquarters

Minicom Advanced Systems Ltd.
Jerusalem, Israel
Tel: +972 2 651 8593
Fax: +972 2 651 8971

USA

Minicom Advanced Systems Inc.
New Jersey, USA
Tel: (toll free) +1 888 486 2154
Tel: +1 908 486 2100
Fax: +1 908 486 7788

German Europe

Minicom Advanced Systems GmpH.
Zurich, Switzerland
Tel: +41 1 455 6220
Fax: +41 1 455 6225

Italy

Minicom Advanced Systems Srl.
Rome, Italy
Tel: +39 06 8209 7902
Fax: +39 06 8209 7903
www.minicom.it